

MAGNA WBG30

WEAK BASE ANION

**EPOXY POLYAMINE GEL
FREE BASE FORM**

ResinTech WBG30 is a free base form granular gel epoxy polyamine weak base anion resin. It has a higher capacity than other anion exchange resins and has substantial strong base functionality. WBG30 is intended for single use applications that require the highest possible operating capacity.

APPLICATIONS

- Cartridge Applications
- Single Use Applications

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS	
Polymer Matrix	Epoxy Polyamine Gel
Ionic Form	Free Base
Functional Group	Polyamine
Physical Form	Spherical Beads
Particle Size	12 to 50 US Mesh (297 - 1680 µm)
% < 50 mesh (300µm)	< 1%
Uniformity Coefficient	2.0
Reversible Swelling	Free Base to HCl 10% to 15%
Temp Limit	110°F (43°C)
Capacity (meq/mL)	2.8
Moisture Retention	52% to 58%
Shipping Weight	37 - 39 lbs/ft ³ (593 - 625 g/L)
Color	Amber
Regenerability	Yes

PACKAGING OPTIONS

- 500 ml samples
- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks

Revision 1.0
© 2020 ResinTech, Inc.





MAGNA

WBG30

WEAK BASE ANION

EPOXY POLYAMINE GEL
FREE BASE FORM

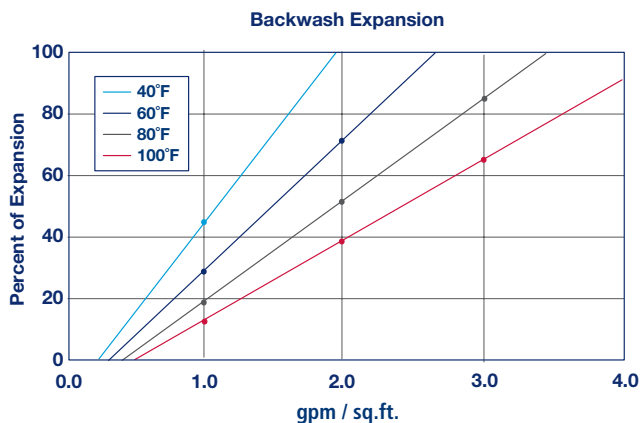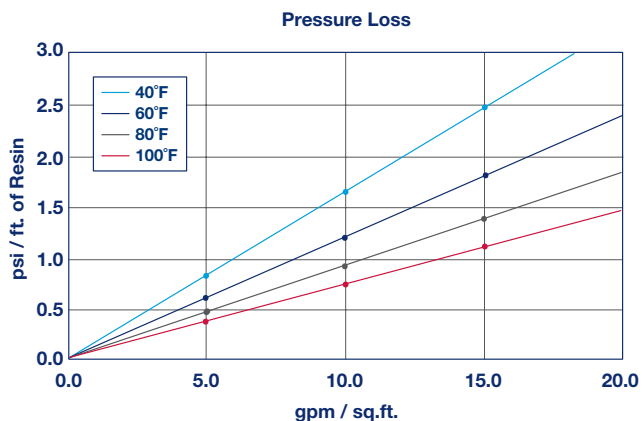

CARTRIDGE USE

ResinTech WBG30 has higher capacity than any other weak base anion resin. The very high capacity makes WBG30 an ideal choice for cartridges. WBG30 is a granular rather than a spherical media.

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	110°F
Free Base form	
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	20 psi
Operating pH range	<9 SU
Regenerant Concentration	
Hydroxide cycle	1 to 6 percent NaOH
Regenerant level	3 to 8 lbs./cu.ft.
Regenerant flow rate.	0.5 to 1.0 gpm/cu.ft.
Regenerant contact time	>30 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	1 to 4 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums.
For operation outside these guidelines, contact ResinTech Technical Support

SINGLE USE APPLICATIONS

ResinTech WBG30 is ideal for single use applications because it has higher capacity than any other weakly basic anion resin. It can be used in disposable cartridges or in larger tanks where the resin is sluiced out when spent and replaced with fresh resin. Aries Filterworks, a division of ResinTech, can provide WBG30 in cartridges or tanks for a variety of single use applications.

Revision 1.0
© 2020 ResinTech, Inc.

