

PRODUCT SPECIFICATION SHEET

MAGNA SBG1-OH-CP

STRONG BASE ANION

CONDENSATE POLISHING GRADE
TYPE I ANION
POLYSTYRENIC GEL
HYDROXIDE FORM

ResinTech SBG1-OH-CP is a polisher grade type 1 gel strong base anion resin in hydroxide form. It offers high capacity and resistance to both thermal and chemical oxidation. It is a uniform particle size resin optimized for minimal pressure loss and perfect separation from "CP" grade cation resins. SBG1-OH-CP is ideally suited for high flow rate, deep bed condensate polishing applications when paired with either CG10-H-CP or SACMP-H-CP.

APPLICATIONS

- Condensate Polishing
- Anion Component in Mixed Beds

TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS

Polymer Matrix	Styrenic Gel
Ionic Form	Hydroxide
Functional Group	Trimethylamine
Physical Form	Spherical Beads
Particle Size	16 to 50 US Mesh (297 - 1190 µm)
% < 50 mesh (300µm)	< 0.5%
Minimum Sphericity	95%
Uniformity Coefficient	1.2
Reversible Swelling	OH to Cl -18% to -25%
Temp Limit	140°F (60°C)
Capacity (meq/mL)	1.05
Moisture Retention	52% to 60%
Shipping Weight	41 - 43 lbs/ft ³ (657 - 689 g/L)
Color	Yellow to Orange
Regenerability	Yes
Uniform Particle Size	Yes

PACKAGING OPTIONS

- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks

Revision 1.0
© 2020 ResinTech, Inc.





MAGNA

SBG1-OH-CP

STRONG BASE ANION

CONDENSATE POLISHING GRADE
TYPE I ANION
POLYSTYRENIC GEL
HYDROXIDE FORM

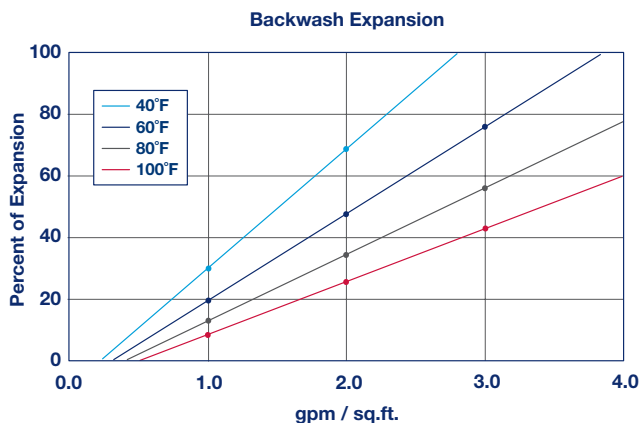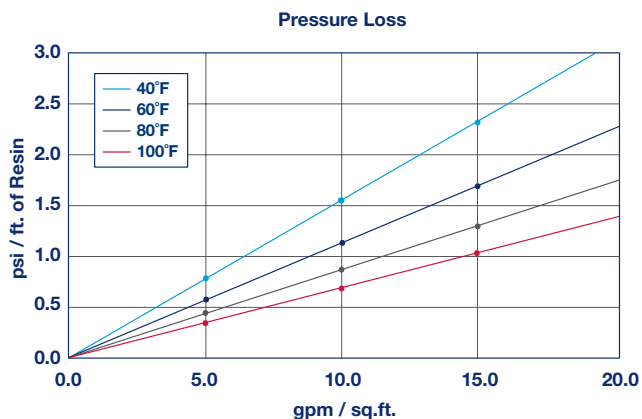

CONDENSATE POLISHING

SBG1-OH-CP is ideally suited for high pressure condensate polishing applications. It has very high capacity and provides long service life when treating condensates that contain traces of CO₂ and other anionic contaminants. SBG1-OH-CP has narrowly graded particle size to provide low pressure loss and help improve separation from CP grade cation resins.

MAXIMUM IMPURITIES

Anionic impurities

Equivalent percent Chloride (% Cl)	< 1.5
Equivalent percent Sulfate (% SO ₄)	< 1.5
Equivalent percent Hydroxide (% OH)	> 95

Crush strength

Average, grams per bead	> 350
Percent greater than 200 grams	> 95

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature	140°F
Maximum intermittent temperature	180°F
Minimum bed depth	24 inches
Backwash expansion	25 to 50 percent
Maximum pressure loss	20 psi
Operating pH range	0 to 14 SU
Regenerant Concentration	
Hydroxide cycle	2 to 6 percent NaOH
Regenerant level	4 to 10 lbs./cu.ft.
Regenerant flow rate	0.25 to 1.0 gpm/cu.ft.
Regenerant contact time	>40 minutes
Displacement flow rate	Same as dilution water
Displacement volume	10 to 15 gallons/cu.ft.
Rinse flow rate	Same as service flow
Rinse volume	35 to 60 gallons/cu.ft.
Service flow rate	2 to 15 gpm/cu.ft.

Note: These guidelines describe average low risk operating conditions. They are not intended to be absolute minimums or maximums. For operation outside these guidelines, contact ResinTech Technical Support

Revision 1.0
© 2020 ResinTech, Inc.

